

SPECIFICATIONS

Span width:
12.00m

Eave Height:
2.30m

Ridge Height:
4.48m

Peak height:
N/A

Bay distance:
3.00m

Roof pitch:
20°

Number of gable uprights:
3 Gable uprights (per end)

Longest component (m):
6.40m

Minimum length:
9.00m

Maximum length:
Unlimited in 3.00 m increments

Snow loading compliance:
N/A

Max allowed wind speed to Norm DIN EN 13782:
80 km/h (0.30kN/m²)



Main profile size:
114/80/4.5mm (4-Channel)

Eave connection type:
Internal galvanised steel insert

Aluminium type:
European - Hard Pressed Extruded Structural Aluminium

Connecting components:
European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:
Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

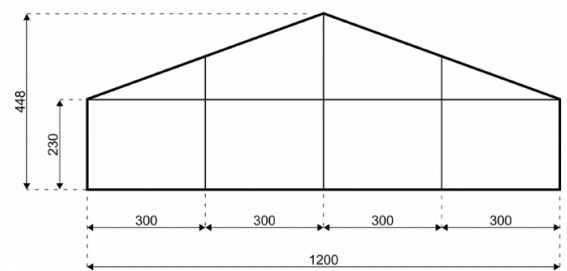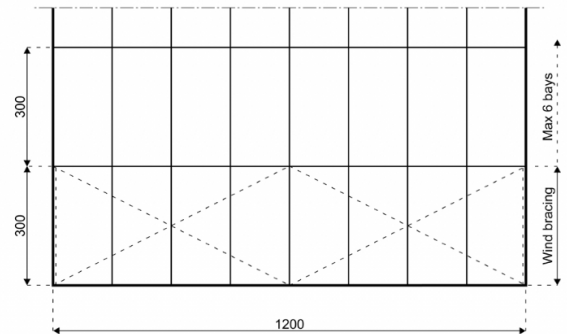

ACCESSORIES AVAILABLE

- ▶ ABS Solid Wall
- ▶ Clear Poly-glass
- ▶ Double Entrance/Exit Door
- ▶ Frame Transportation Storage Rack
- ▶ ABS Transportation Storage Rack
- ▶ Roof Cover Transportation Storage Rack
- ▶ External & Internal Lighting
- ▶ Georgian Poly-glass Window Walls
- ▶ Aluminium Cassette Flooring with Ply Boards
- ▶ Door Transportation Storage Rack
- ▶ External / Internal Entrance Ramp
- ▶ Glass / ISO Walling Transportation Storage Rack