

SPECIFICATIONS

Span width:
20.00m

Eave Height:
3.00m

Ridge height:
6.25m

Peak height:
N/A

Bay distance:
5.00m

Roof pitch:
18°

No of gable uprights:
3 Gable upright (per end)

Longest component (m):
10.70m

Minimum length:
20.00m

Maximum length:
Unlimited in 5.00 m increments

Snow loading compliance:
N/A

Max allowed wind speed to DIN:
102 km/h (0.50kN/m²)



Main profile size:
220/100/3mm (4 Channel)

Eave connection type:
Aluminium Sliding

Aluminium type:
European - Hard Pressed Extruded
Structural Aluminium

Connecting components:
European - hot dipped, structural grade
corrosive resistant galvanised steel

Textile roof and wall covering:
Premium grade, high gloss white, PVC
coated polyester fabric - UV resistant and
flame retardant according to: DIN 4102 B1,
M2; BS 5438/7837; USA NFPA701.

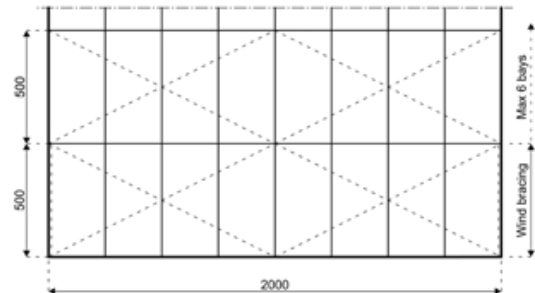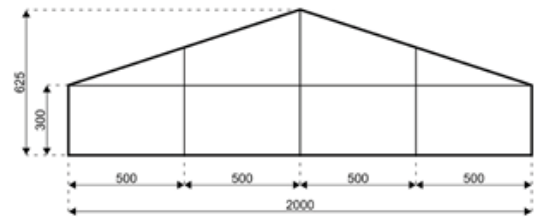

ACCESSORIES AVAILABLE

- ▶ ABS Solid Wall
- ▶ Clear Poly-glass
- ▶ Double Entrance/Exit Door
- ▶ Frame Transportation Storage Rack
- ▶ ABS Transportation Storage Rack
- ▶ Roof Cover Transportation Storage Rack
- ▶ External & Internal Lighting
- ▶ Georgian Poly-glass Window Walls
- ▶ Aluminium Cassette Flooring with Ply Boards
- ▶ Door Transportation Storage Rack
- ▶ External / Internal Entrance Ramp
- ▶ Glass / ISO Walling Transportation Storage Rack