



ESSELMONT

MARQUEES

SPECIFICATIONS

Span width:
3.00m

Eave Height:
2.30m

Ridge Height:
3.00m

Peak height:
4.86m

Bay distance:
3.00m

Roof pitch:
20° inner roof pitch

Number of gable uprights:
0

Longest component (m):
2.90m

Minimum length:
3.00 m

Maximum length:
Multiple configurations possible

Snow loading compliance:
N/A

Max allowed wind speed to Norm DIN EN 13782:
80 km/h (0.30kN/m²)



Main profile size:
94/48/3mm (3 channel)

Eave connection type:
Internal Galvanised Steel Insert

Aluminium type:
European - Hard Pressed Extruded Structural Aluminium

Connecting components:
European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:
Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

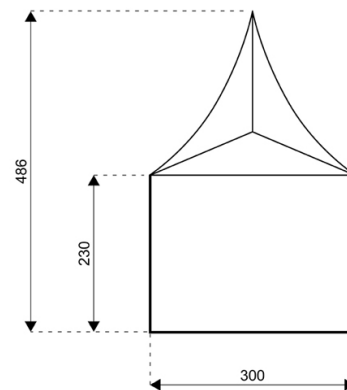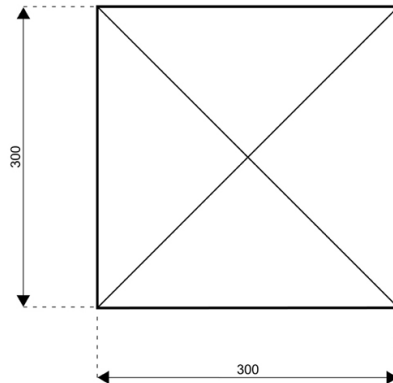

ACCESSORIES AVAILABLE

- ▶ ABS Solid Wall
- ▶ ABS Transportation Storage Rack
- ▶ Aluminium Cassette Flooring with Ply Boards
- ▶ Bar Tensioned Roof
- ▶ Clear Poly-glass Roof
- ▶ Cover Transportation Storage Rack
- ▶ Door Transportation Storage Rack
- ▶ Double Entrance/Exit Door
- ▶ External & Internal Lighting
- ▶ External / Internal Entrance Ramp
- ▶ Frame Transportation Storage Rack
- ▶ Georgian Poly-glass Window Walls

The Rock, Westfield, Contlaw Road, Milltimber, AB13 0EX

01224 739188 / 07729 875441
dan@esslemontmarquees.co.uk