

SPECIFICATIONS

Span width:
6.00m

Eave Height:
2.30m

Ridge Height:
3.77m

Peak height:
5.79m

Bay distance:
6.00m

Roof pitch:
20° inner roof pitch

Number of gable uprights:
0

Longest component (m):
5.90m

Minimum length:
6.00 m

Maximum length:
Multiple configurations possible

Snow loading compliance:
N/A

Max allowed wind speed to Norm DIN EN 13782:
80 km/h (0.30kN/m²)

Main profile size:
94/48/3mm (3 channel)



Eave connection type:
Internal Galvanised Steel Insert

Aluminium type:
European - Hard Pressed Extruded Structural

Aluminium
Connecting components:

European - hot dipped, structural grade corrosive
resistant galvanised steel

Textile roof and wall covering:
Premium grade, high gloss white, PVC coated
polyester fabric - UV resistant and flame
retardant according to: DIN 4102 B1, M2; BS
5438/7837; USA NFPA701.

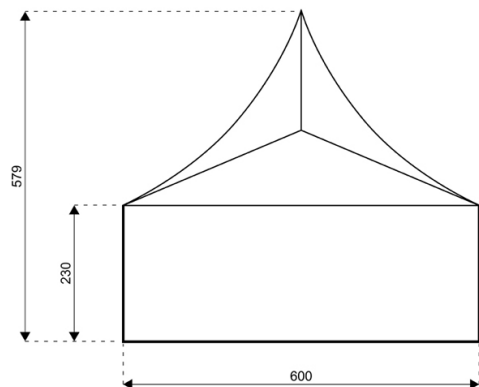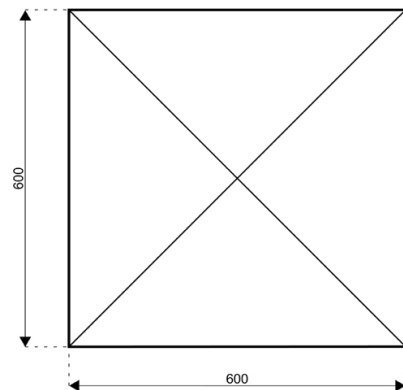

ACCESSORIES AVAILABLE

- ▶ ABS Solid Wall
- ▶ Bar Tensioned
- ▶ Door Transportation Storage Rack
- ▶ External / Internal Entrance Ramp
- ▶ ABS Transportation Storage Rack
- ▶ Roof Clear Poly-glass Roof
- ▶ Double Entrance/Exit Door
- ▶ Frame Transportation Storage Rack
- ▶ Aluminium Cassette Flooring with Ply Boards
- ▶ Cover Transportation Storage Rack
- ▶ External & Internal Lighting
- ▶ Georgian Poly-glass Window Walls