

## SPECIFICATIONS

Span width:  
9.00m

Eave Height:  
2.30m

Ridge Height:  
3.94m

Peak height:  
Field Not Applicable

Bay distance:  
3.00m

Roof pitch:  
20°

Number of gable uprights:  
2 Gable uprights (per end)

Longest component (m):  
4.80m

Minimum length:  
6.00m

Maximum length:  
Unlimited in 3.00 m increments

Snow loading compliance:  
Field Not Applicable

Max allowed wind speed to Norm DIN EN 13782:  
80 km/h (0.30kN/m<sup>2</sup>)



Main profile size:  
94/48/3mm (4-Channel)

Eave connection type:  
Internal galvanised steel insert

Aluminium type:  
European - Hard Pressed Extruded Structural Aluminium

Connecting components:  
European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:  
Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

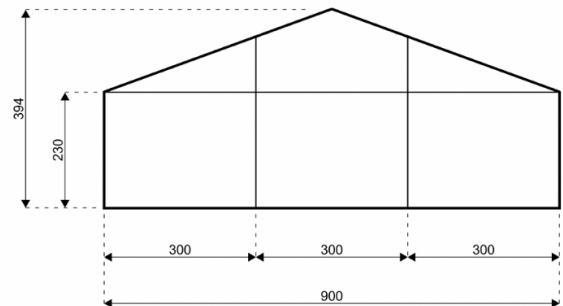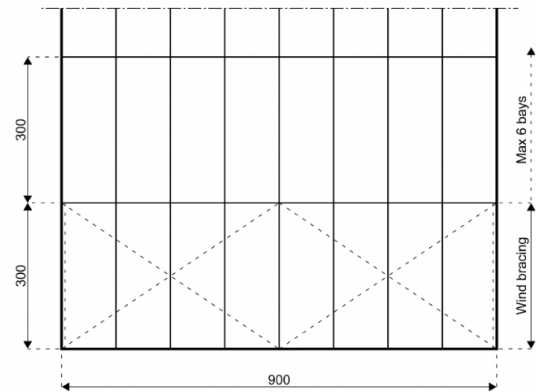

## ACCESSORIES AVAILABLE

- ▶ ABS Solid Wall
- ▶ Clear Poly-glass
- ▶ Double Entrance/Exit Door
- ▶ Frame Transportation Storage Rack
- ▶ ABS Transportation Storage Rack
- ▶ Roof Cover Transportation Storage Rack
- ▶ External & Internal Lighting
- ▶ Georgian Poly-glass Window Walls
- ▶ Aluminium Cassette Flooring with Ply Boards
- ▶ Door Transportation Storage Rack
- ▶ External / Internal Entrance Ramp
- ▶ Glass / ISO Walling Transportation Storage Rack